


**FCS-5060**

## **2MP WDR Vari-focal AF Bullet Network Camera**

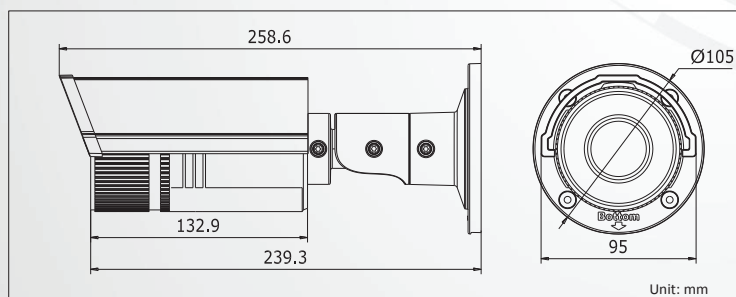

- 1/2.8" Progressive Scan CMOS
- Up to 2 megapixel resolution
- 120dB WDR
- 3D DNR
- Motorized lens 2.8-12mm
- Up to 30 meters IR range
- Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB
- Audio/alarm I/O (optional)
- 12V DC $\pm$ 10% & PoE(802.3af)
- Support H.264+
- IP66

### **Accessories**



Vertical pole mount



Junction box

# FCS-5060

## 2MP WDR Vari-focal AF Bullet Network Camera



### Specification

| Camera               |                                                                                                                                                               |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor         | 1/2.8" Progressive Scan CMOS                                                                                                                                  |
| Min. Illumination    | 0.01Lux @(F1.2,AGC ON), 0.014 Lux @(F1.4,AGC ON), 0 Lux with IR                                                                                               |
| Shutter Speed        | 1/3 s ~ 1/10,000 s                                                                                                                                            |
| Slow Shutter         | Support                                                                                                                                                       |
| Lens                 | 2.8 - 12 mm @ F1.4, motorized lens                                                                                                                            |
| Lens Mount           | Ø14                                                                                                                                                           |
| Day & Night          | IR cut filter with auto switch                                                                                                                                |
| WDR                  | 120dB                                                                                                                                                         |
| Compression Standard |                                                                                                                                                               |
| Video Compression    | H.264/MJPEG/H.264+                                                                                                                                            |
| H.264 Type           | Main Profile                                                                                                                                                  |
| Video Bit Rate       | 32 Kbps – 16 Mbps                                                                                                                                             |
| Audio (-S)           | G.711/G.722.1/G.726/MP2L2<br>64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)                                                              |
| Image                |                                                                                                                                                               |
| Max. Resolution      | 1920 × 1080                                                                                                                                                   |
| Frame Rate           | 50Hz: 25fps(1920 × 1080, 1280 × 960, 1280 × 720)<br>60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)                                                         |
| Image Enhancement    | BLC/3D DNR/ROI                                                                                                                                                |
| Image Setting        | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser                                                         |
| Day/Night Switch     | Auto/Schedule/Triggered by Alarm In                                                                                                                           |
| Network              |                                                                                                                                                               |
| Network Storage      | NAS (Support NFS,SMB/CIFS); ANR, Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB                                                                          |
| Alarm Trigger        | Intrusion detection, Line crossing detection, Motion detection, Dynamic analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception |
| Protocols            | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour                         |
| Security             | One-key reset, flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, anonymous access         |
| Standard             | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI                                                                                                                |
| General              |                                                                                                                                                               |
| Interface            | 1 RJ45 10M/100M Ethernet interface                                                                                                                            |
| Operating Conditions | -30 °C ~ 60 °C (-22 °F – 140 °F), Humidity 95% or less (non-condensing)                                                                                       |
| Power Supply         | 12V DC±10%, PoE (802.3af)                                                                                                                                     |
| Power Consumption    | Max. 5.5 W (Max. 7.5 W with IR cut filter on)                                                                                                                 |
| Ingress Protection   | IP66                                                                                                                                                          |
| IR Range             | 20~30 meters                                                                                                                                                  |
| Dimensions           | 95×105×258.6 mm (3.74" × 4.13" × 10.18")                                                                                                                      |
| Weight               | 1200g (2.65 lbs)                                                                                                                                              |