

ServCon MFP Server FUS-3100

H/W ver: v1.x

one world_one brand_one level_

1-port USB 2.0 MFP Server


Support for HP and Non-HP MFP Printers

The LevelOne FUS-3100 is a 1-port USB 2.0 MFP (Multi Function Printer) server that enables network users to share a multi-function printer on the same network. This simple and cost-effective MFP server works with MFP and GDI printers and provides support for print, scan and PC fax (MFP must support PC fax)* from a computer connected via the network to the FUS-3100.

The FUS-3100 is targeted at groups that need to share multi-function printer on the same network for printing, scanning and PC fax.

Net-USB Support

The USB 2.0 port of the FUS-3100 MFP Server connects to any USB MFP or GDI printer. It is using a brand new technology call Net-USB. The Net-USB allows the MFP server to simulate a direct PC-host connection to the printer, enabling users to install individual printer drivers in order to manage the printer as if it was connected directly the computer. Adapting this brand new technology makes FUS-3100 an excellent MFP (Multi-Function printer) management server.



The Web-based and control centre utility management interface allows users for quick set-up and configuring of the MFP server.

* PC Fax Interface

The Multi-function printer connected to the network must support the Windows based PC Fax interface as some MFP printers only support direct fax send out from the printer. Please check your MFP hardware specification if user intends to use PC fax.

Key Features

- Share a USB MFP or GDI printer among network users
- Supports network scan and PC Fax for Multi-function printers (MFP)
- Compatible with most GDI and MFP printers
- Support SMB and FTP File Transfer Protocol
- Supports DHCP Client
- Provides an utility tool for Windows 2000/XP/Vista
- Supports easy setup through Web Browser



FUS-3100



ServCon MFP Server FUS-3100

one world_one brand_one level_

Technical Specification

Network Interface
 1 x 10/100 Mbps RJ-45 Ethernet port
 1x USB 2.0 Host port

- Supported Operating Systems Microsoft Windows 2000/XP/Vista
- Print Server Protocols Net USB
- File Server SMB/FTP
- MFP Function Printing, Scanning and PC Fax
- Management
 Web-based User-interface for configuration,
 monitoring and firmware upgrading
 Windows management utility
- LEDs Power, Link, ACT, USB connection status

- Power Supply DC 12V, 1A
- Power Consumption 12W
- Physical Specification
 Operating Temperature

5°C ~ 40°C


Humidity

0% ~ 70% (Non-condensing)

Dimension & Weight 80mm (L) * 60mm (W) * 25mm (H) 55q

Certifications
 EMI and Safety FCC part 15 Subpart C, Class
 B, VCCI Class B

Product Diagram

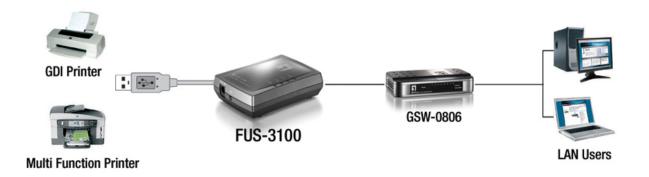

Ordering Information

FUS-3100: 1-port USB 2.0 MFP Server

