




LevelOne 無線路由器設定 (此設定適用於:WBR-3408TX)


<電腦設定>

一. WinXP 設定


1. 點選 開始→控制台→網路連線 按滑鼠右鍵選擇『開啟』。

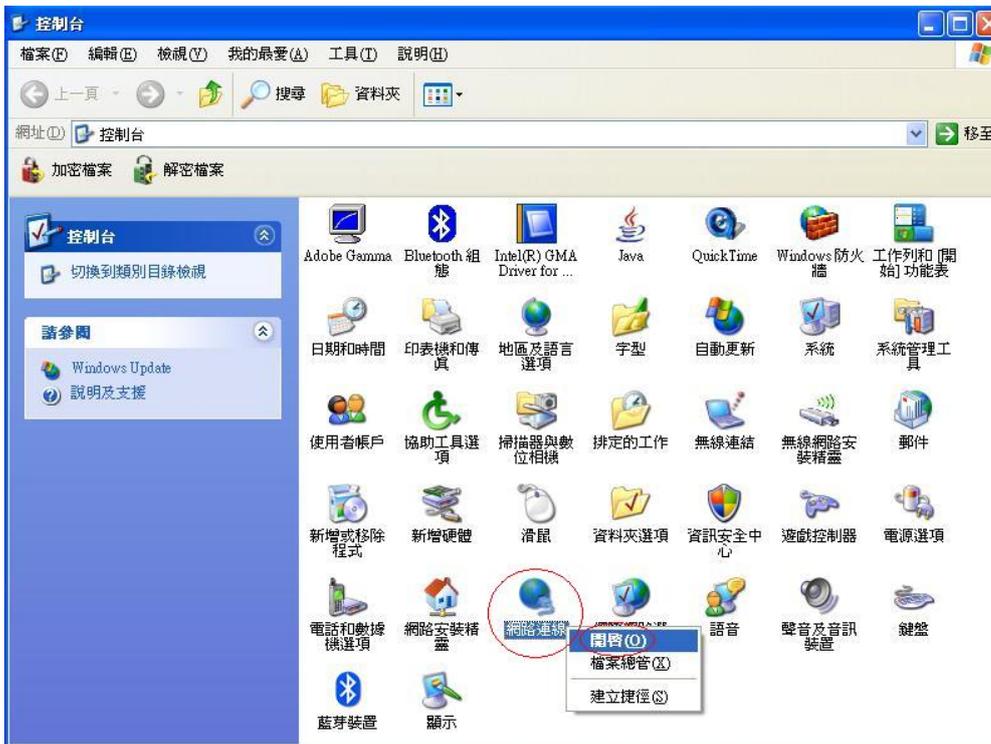


2. 點選『區域連線』按滑鼠右鍵選擇『內容』。

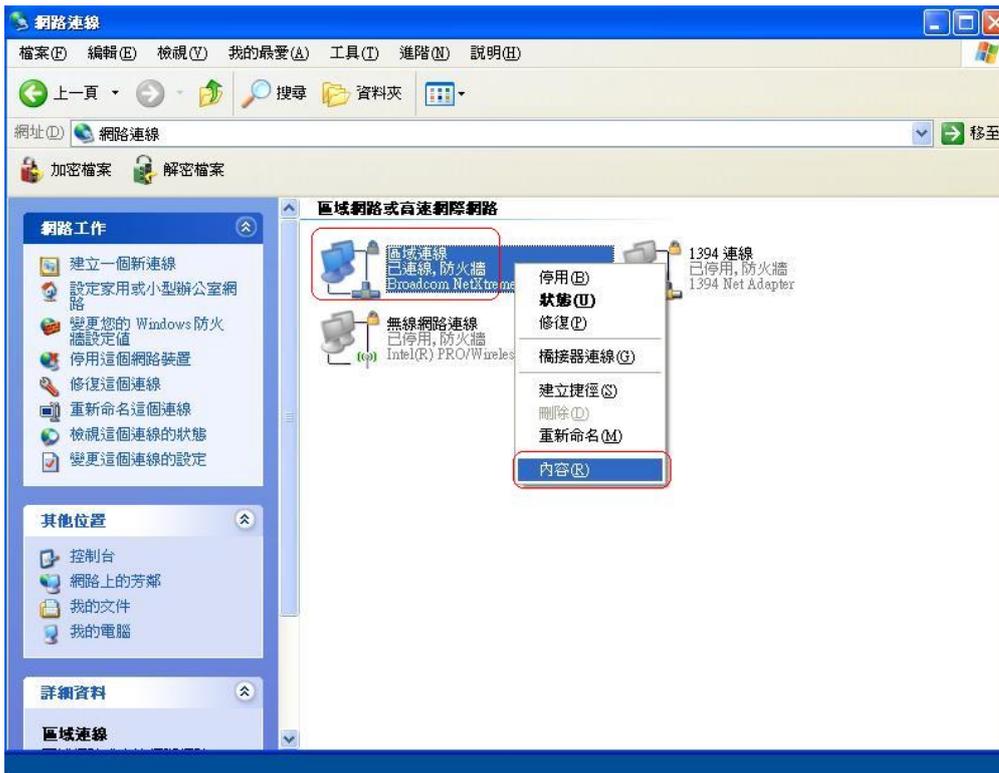

3. 點選『一般』→ Internet Protocol (TCP/IP) → 內容。

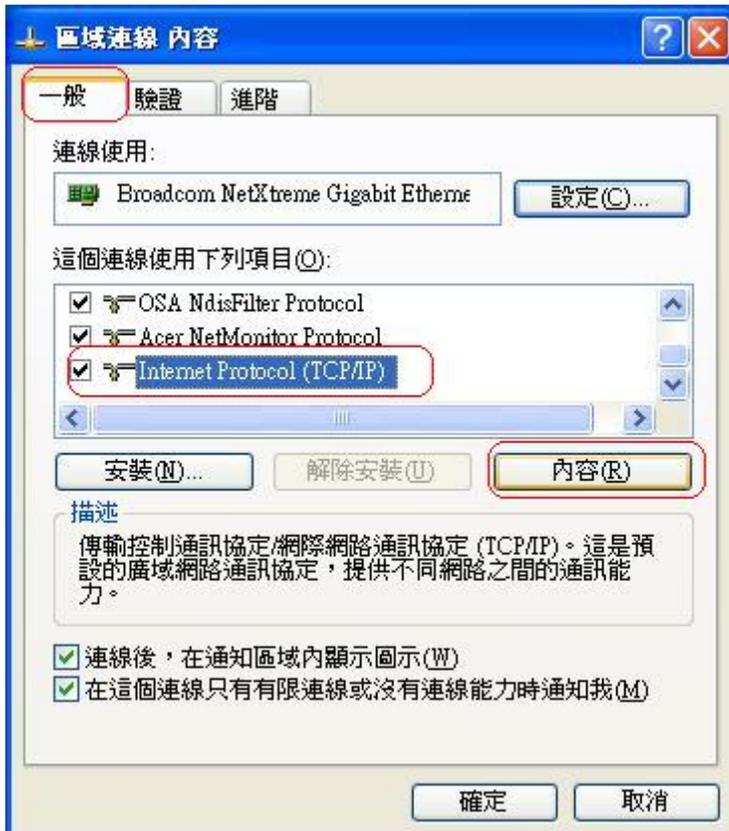

4. 點選“自動取得 IP 位址”和“自動取得 DNS 伺服器位址” → 確定。

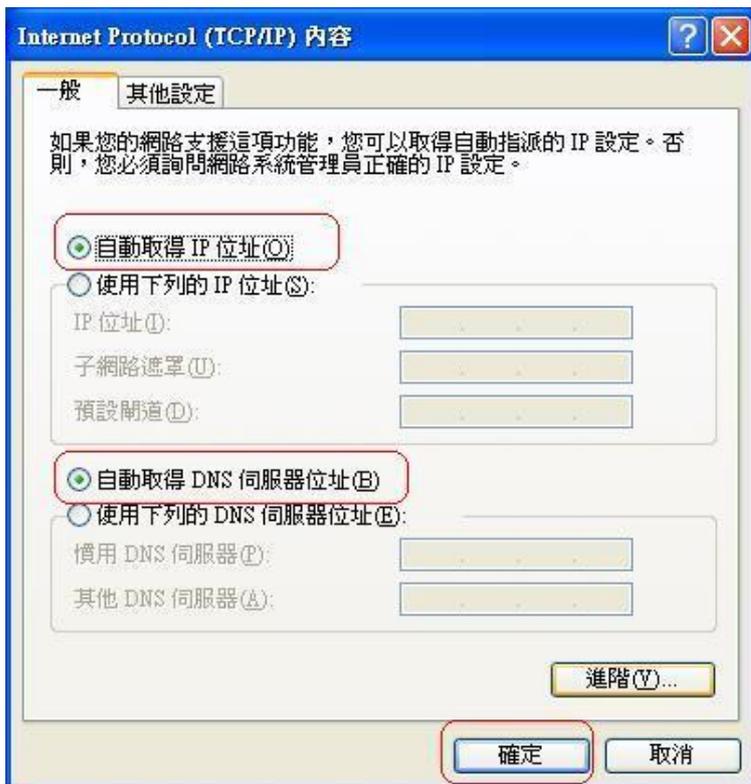


5. 設定完成請重新開啓電腦。

機器連接示意圖

1. 請先關閉電腦及 WBR-3408TX。
2. 將數據機上的網路線接到 WBR-3408TX 的 WAN 埠。
3. 再使用另一條網路線將 WBR-3408TX 任一埠的 LAN 埠與 PC 的網路卡連接。
4. 先插上 WBR-3408TX 的電源器再開啓電腦電源。

連接路由器

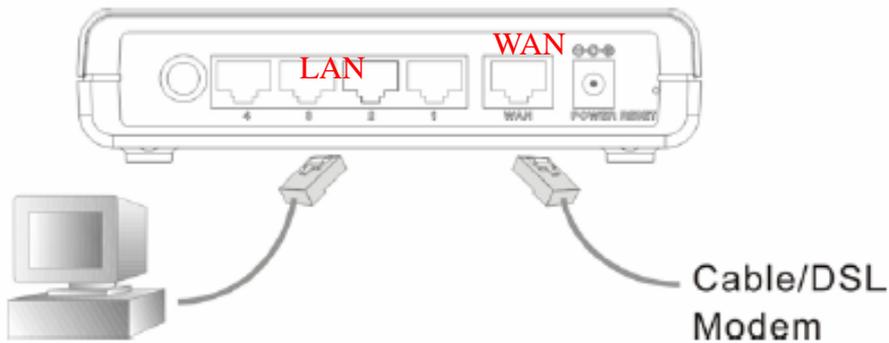


1. 點選桌面上 Internet Explorer 圖示開啓瀏覽器。
2. 在Web瀏覽器網址欄位內輸入 “<http://192.168.0.1>” 按Enter 鍵。

1.1 選擇 “WAN Wizard”


The screenshot shows the Windows Internet Explorer browser window displaying the setup page for a level one Wireless BroadBand Router. The browser's address bar shows the URL <http://192.168.0.1/home.htm>. The page features a blue background with the level one logo on the left and the title "Wireless BroadBand Router" in large yellow letters. A sidebar on the left contains navigation links: "WAN Wizard" (highlighted with a red box), "LAN", "Wireless", "Password", "Status", "Advanced", "Help", and "Log Out". The main content area displays configuration details for the WAN, Wireless, and LAN sections.

SC11FE68	
Internet:	IP Address:
	Connection: DHCP
	NAT: Enable
<hr/>	
Wireless:	SSID: default
	WEP: Off
<hr/>	
LAN:	IP Address: 192.168.0.1
	DHCP Server: ON



1.2 按 "Next>"

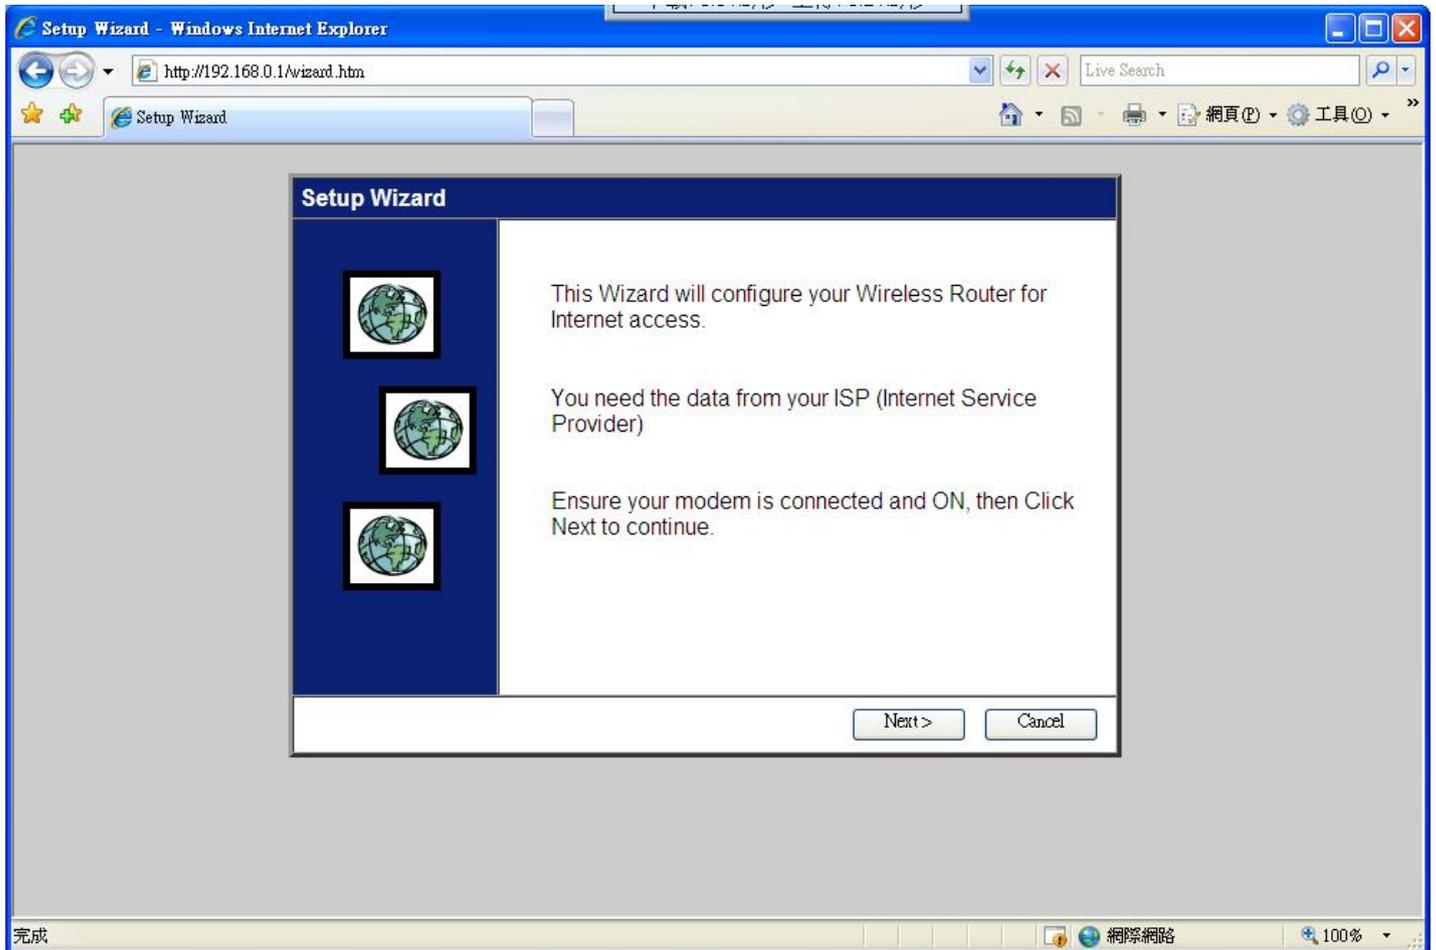


1.3 選擇 "DSL/ADSL modem (phone-type cable) > Next"

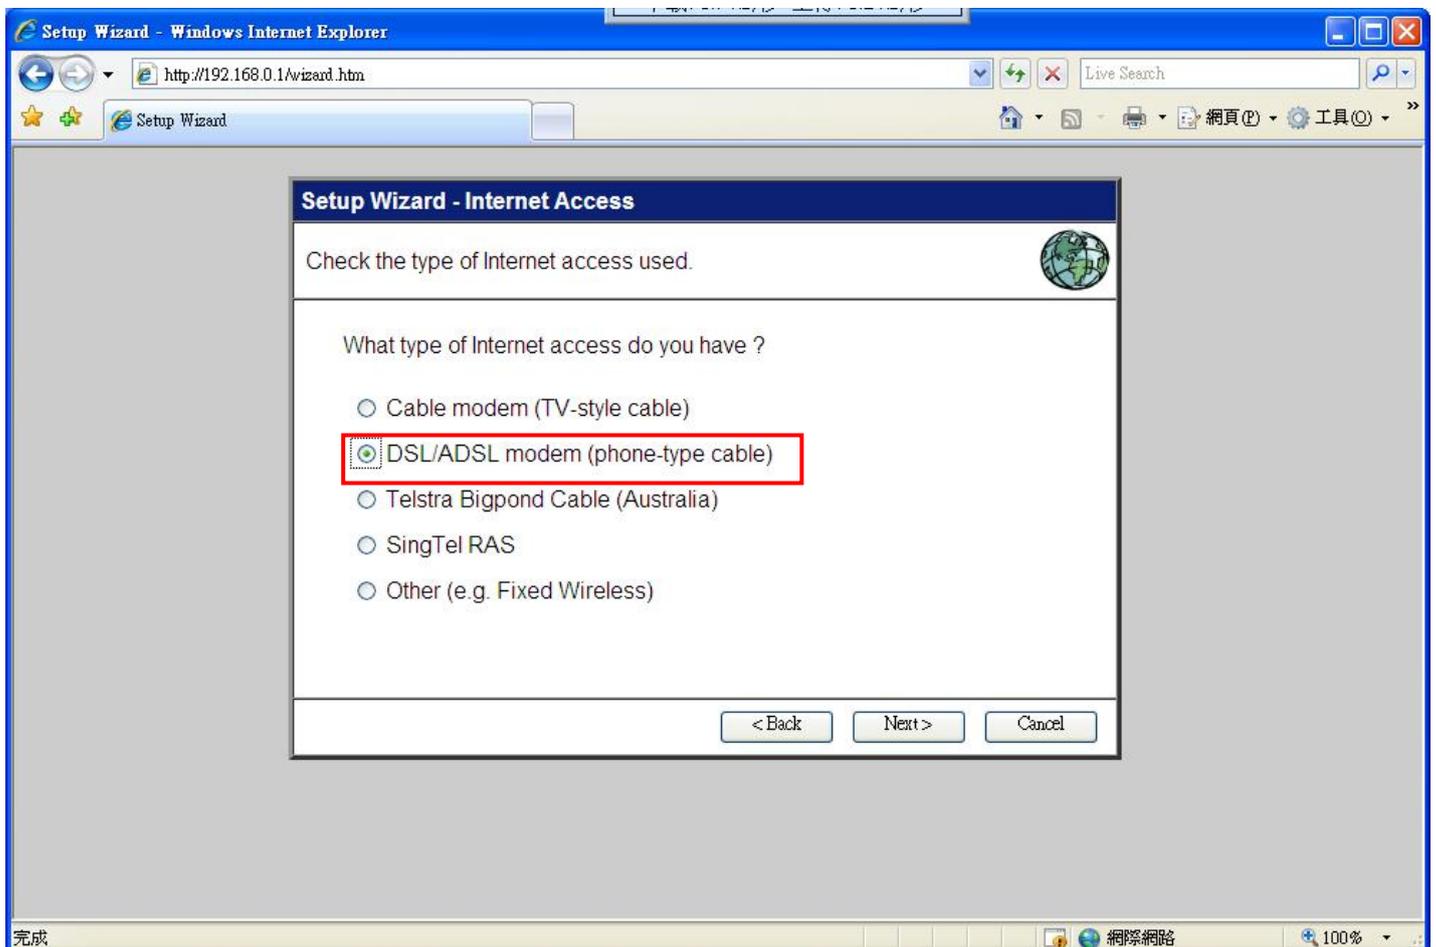


選擇 “PPPoE”

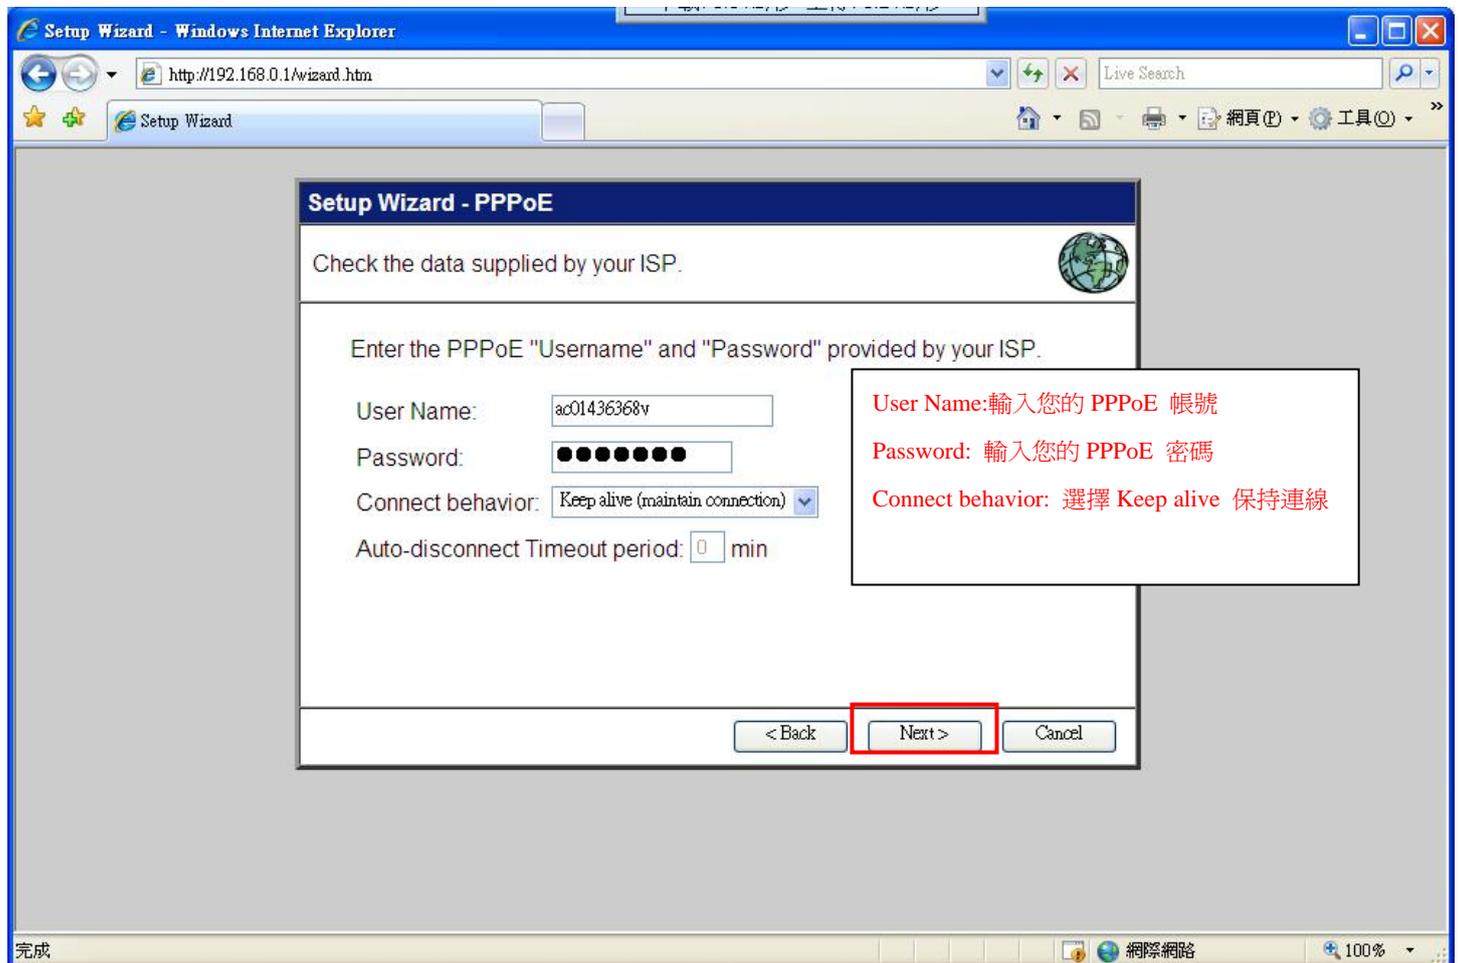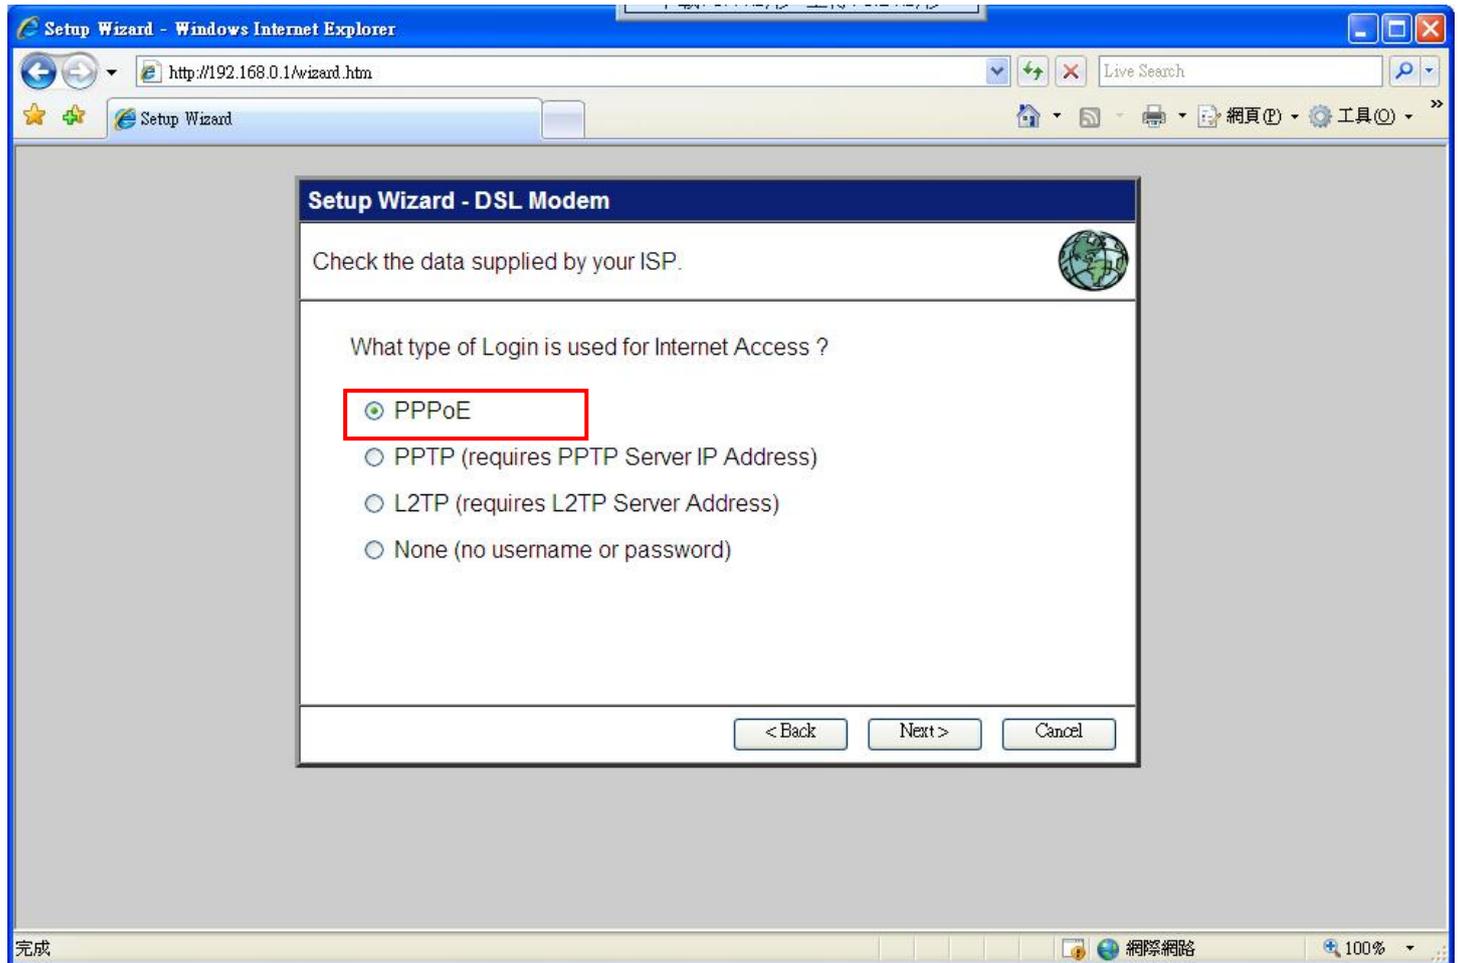

如果您 PPPoE 是動態的請選擇 “Dynamic IP Address”

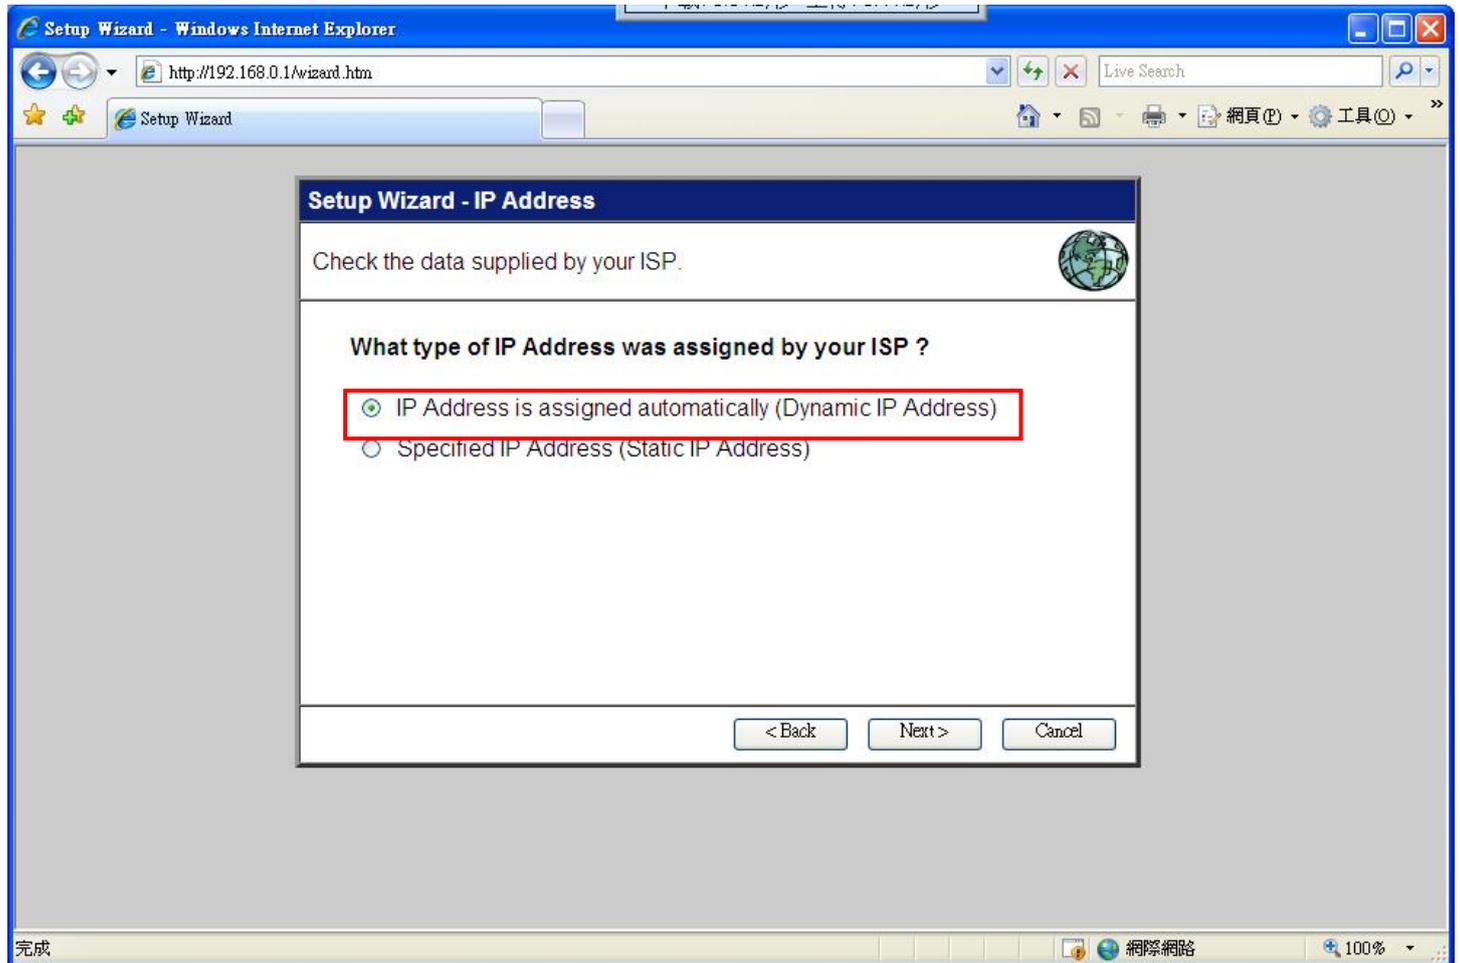

按下 Finish 然後 Close

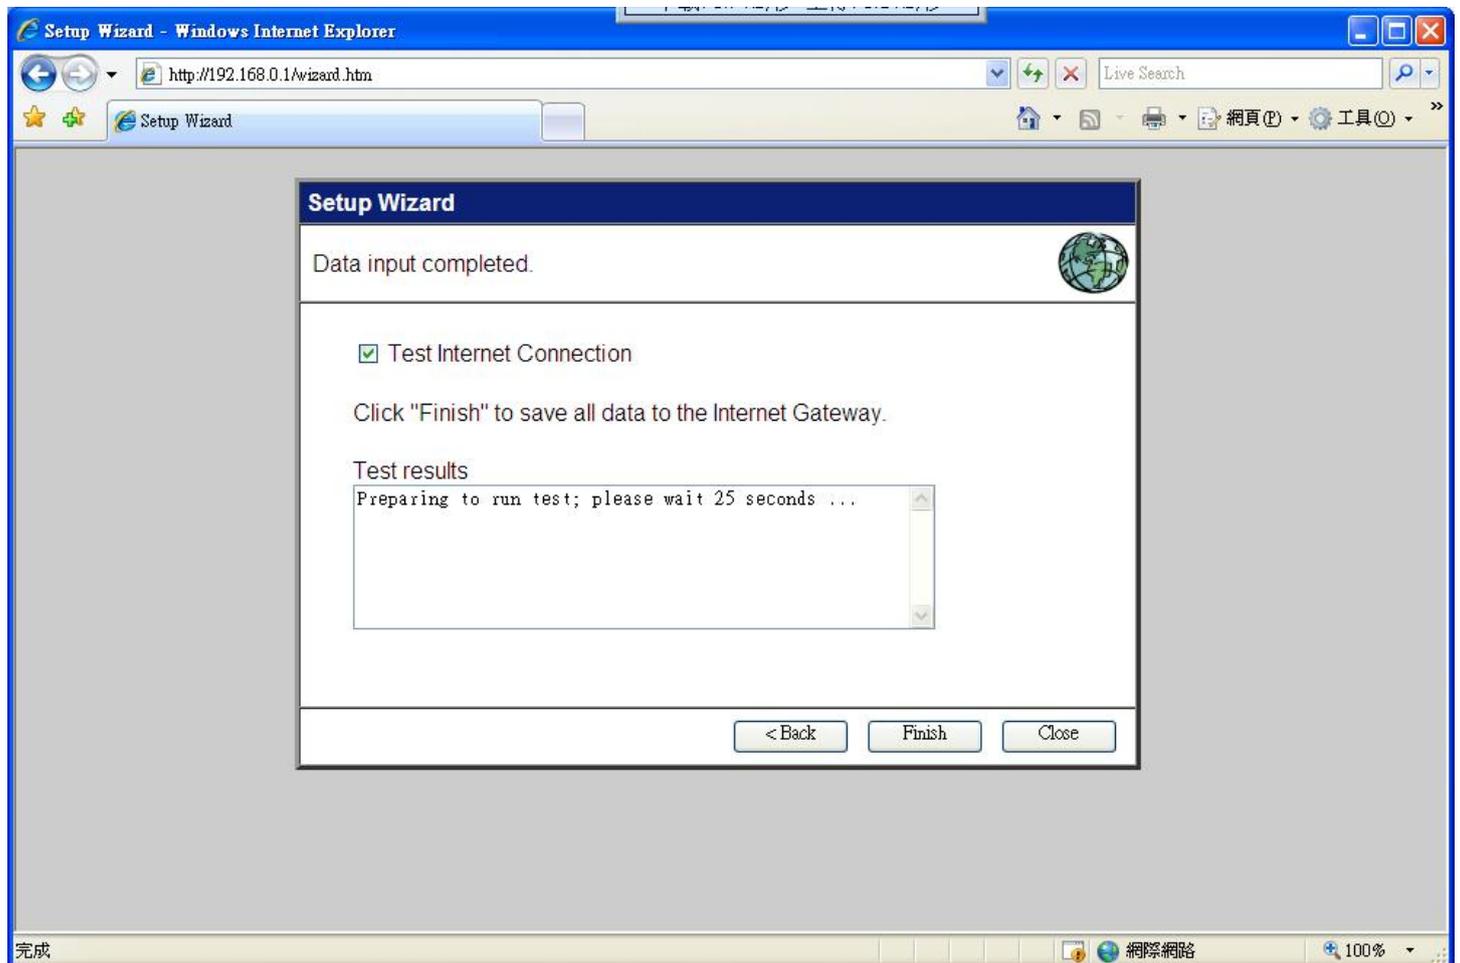

Setup - Windows Internet Explorer

http://192.168.0.1/home.htm

level[®]
one

[WAN Wizard](#)

[LAN](#)

[Wireless](#)

[Password](#)

[Status](#)

[Advanced](#)

[Help](#)

Log Out

S tatus

Internet Connection Method: PPPoE
Broadband Modem: Connection OK
Internet Connection: Active
Internet IP Address: 61.217.218.97
NAT: Enable

Connection Details

LAN IP Address: 192.168.0.1
Network Mask: 255.255.255.0
DHCP Server: ON

System Device Name: SC11FE68
Firmware Version: Version 1.0 Release 1C

System Data

完成 網際網路 100%