

WBR-3402 WBR-3403 WBR 3404 WBR-3406 WAP-0007

WBR-5400 WAP-0010 WDS Setting

WDS configuration is similar for the above models, here we use WBR-3406 as example.

Description:

- 1) A WBR-3406TX will be a root node connecting to the modem.
- 2) B WBR-3406TX WDS to A WBR-3406

Notices of physical connection:

- 1) A WBR-3406TX WAN port connect to ADSL/Cable modem
- 2) B WBR-3406TX WAN port → No use(No physical connection)

A WBR-3406TX setting:

- 1) A WBR-3406TX WAN status

The screenshot displays the web console interface for a WBR-3406TX router. The browser window title is "WBR-3406TX Wireless Broadband NAT Router Web-Console - Microsoft Internet Explorer". The address bar shows "http://192.168.10.1/". The main content area is titled "Broadband Router Configuration" and includes a navigation menu with options like "Status", "Wizard", "Basic Setting", "Forwarding Rules", "Security Setting", "Advanced Setting", and "Toolbox".

The "Status" page shows the following WAN configuration:

Item	WAN Status	Sidenote
IP Address	218.167.4.77	PPPoE
Subnet Mask	255.255.255.255	
Gateway	218.167.4.77	
Domain Name Server	168.95.192.1, 168.95.1.1	
Connection Time	00:32:38	<input type="button" value="Disconnect"/>

Below the configuration table, there is a "Statistics of WAN" section:

Statistics of WAN	Inbound	Outbound
Octets	4521298	289700
Unicast Packets	4051	1722
Non-unicast Packets	0	1

At the bottom of the status page, there are buttons for "View Log...", "Clients List...", "Help", and "Refresh". The system time is displayed as "System Time: Friday, July 08, 2005 12:12:24 PM".


2) A WBR-3406TX LAN setting

The screenshot displays the configuration interface for a WBR-3406TX router. The browser window title is "WBR-3406TX Wireless Broadband NAT Router Web-Console - Microsoft Internet Explorer". The address bar shows "http://192.168.10.1/". The page header includes the "level one" logo and the title "Broadband Router Configuration". Navigation links include "Status/ Wizard/ Basic Setting/ Forwarding Rules/ Security Setting/ Advanced Setting/ Toolbox" and a "Logout" button. The "Basic Setting" menu is expanded, showing "Primary Setup", "DHCP Server", "Wireless", and "Change Password". The "Primary Setup" section contains a table of settings:


Item	Setting
LAN IP Address	192.168.10.1
WAN Type	PPP over Ethernet <input type="button" value="Change..."/>
PPPoE Account	84685158@hinet.net
PPPoE Password	<input type="password"/>
Primary DNS	0.0.0.0
Secondary DNS	0.0.0.0
Maximum Idle Time	600 seconds <input checked="" type="checkbox"/> Auto-reconnect
Authentication method	Auto

At the bottom of the settings table are buttons for "Save", "Undo", "More>>", and "Help". The "Current Time" is displayed as "Friday, July 08, 2005 12:13:36 PM". The Windows taskbar at the bottom shows the Start button, several open applications, and the system clock at 12:14 PM.

3) A WBR-3406TX DHCP server setting

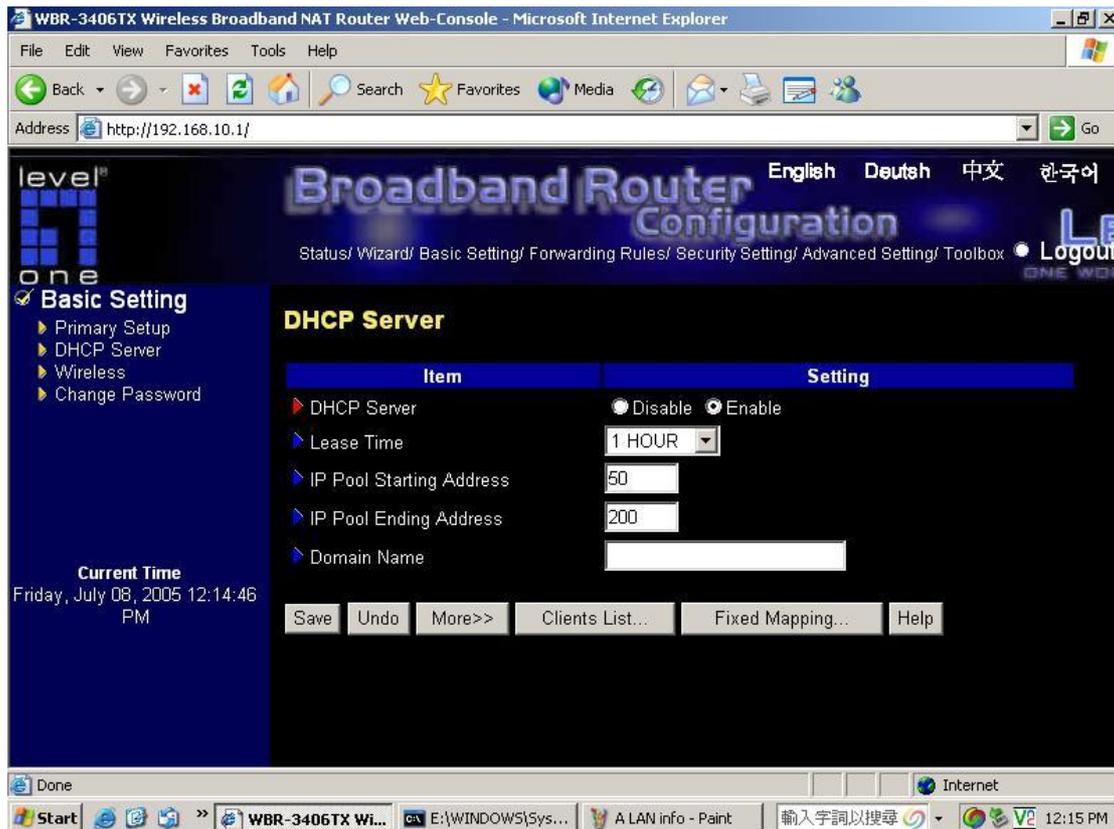

4) A WBR-3406TX wireless setting

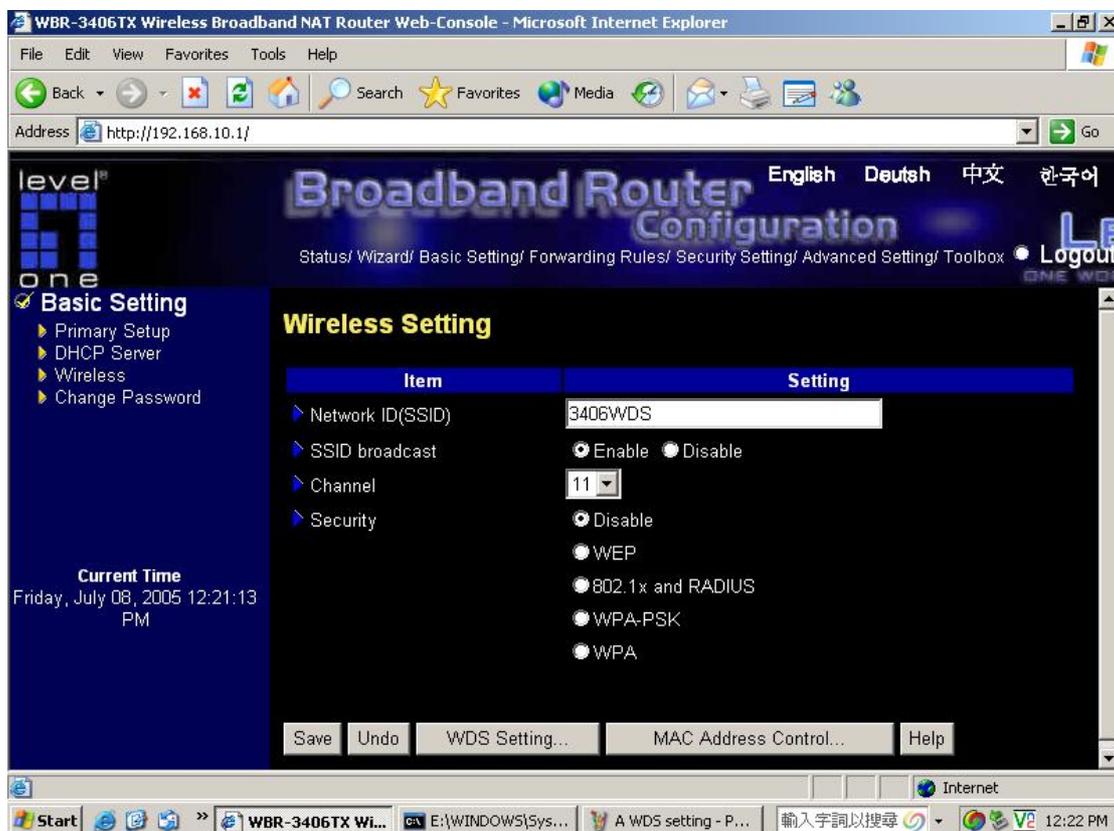

5) The Lan MAC address of A WBR-3406TX

System Information

ITEM	INFO
Version	747D.7166.74AB.1AD9+225B+0010@SuezouW 197e1 \$611
U-Time	00:00:37 (S=00:00:00,P=0/0)00:01:22
D-String	P=7C00,S=0,D=0/0,E=0,B=51/0,R=FFFE {+++++.++++.+++++T.....}
R-Data	WAN MAC=00-11-6B-22-20-AB/DDC6031 LAN MAC=00-11-6B-22-20-AC Checksum=347C
A-String	RA11G;M=00-11-6B-22-20-AC; D=ETSI;A=2;C=1FFF;R=3FFF;St=2;TQ:15/15/15;PriQ:5/5;RQ:29/29;CNT=0/0/0
Device Time	Tue Feb 01 00:01:22 2005

Refresh

6) A WBR-3406TX WDS setting

level one Broadband Router Configuration

English Deutsch 中文 한국어

Status/ Wizard/ Basic Setting/ Forwarding Rules/ Security Setting/ Advanced Setting/ Toolbox Logout

Basic Setting

- Primary Setup
- DHCP Server
- Wireless
- Change Password

Current Time
Friday, July 08, 2005 12:20:25 PM

WDS Setting

Item	Setting
Wireless Bridging	<input type="radio"/> Disable <input checked="" type="radio"/> Enable
Remote AP MAC	00-11-6B-22-51-50

Save Undo Help

B WBR-3406TX settings:

1) B WBR-3406TX Lan setting

找不到伺服器 - Microsoft Internet Explorer

檔案(E) 編輯(E) 檢視(V) 我的最愛(A) 工具(T) 說明(H)

上一頁 搜尋 我的最愛 633 已擷取 選項 移至

網址(D) http://192.168.10.10/

Google 搜尋網頁

level one
Broadband Router Configuration
LEVELONE
Status/ Wizard/ Basic Setting/ Forwarding Rules/ Security Setting/ Advanced Setting/ Toolbox/ Logout

English Deutsh 中文 한국어

Basic Setting

- Primary Setup
- DHCP Server
- Wireless
- Change Password

Current Time
2005-2-1 0:06:46

Item	Setting
LAN IP Address	192.168.10.10
WAN Type	Dynamic IP Address <input type="button" value="Change..."/>
Host Name	<input type="text"/> (optional)
WAN's MAC Address	00-11-6B-22-51-4F <input type="button" value="Clone MAC"/>
Renew IP Forever	<input checked="" type="checkbox"/> Enable(Auto-reconnect)

開始 GRUB Ma... HINET - M... DDCAsia Re: 您好... 找不到同... C:\WIND... 網路連線 找不到同... 15:39

2) B WBR-3406TX DHCP server setting

The screenshot shows the 'DHCP Server' configuration page in the WBR-3406TX web console. The page is titled 'Broadband Router Configuration' and includes a navigation menu with options like 'Status', 'Wizard', 'Basic Setting', 'Forwarding Rules', 'Security Setting', 'Advanced Setting', and 'Toolbox'. The 'Basic Setting' menu is expanded, showing 'Primary Setup', 'DHCP Server', 'Wireless', and 'Change Password'. The 'DHCP Server' section is active, displaying a table of settings:

Item	Setting
DHCP Server	<input checked="" type="radio"/> Disable <input type="radio"/> Enable
Lease Time	1 HOUR
IP Pool Starting Address	100
IP Pool Ending Address	199
Domain Name	

At the bottom of the configuration area, there are buttons for 'Save', 'Undo', 'More>>', 'Clients List...', 'Fixed Mapping...', and 'Help'. The 'Current Time' is displayed as Tuesday, February 01, 2005, 12:31:51 AM. The browser window shows the address 'http://192.168.10.10' and the taskbar includes 'WBR-3406TX Wi...', 'E:\WINDOWS\Sys...', and 'B sysinfo - Paint'.

3) B WBR-3406TX wireless setting

The screenshot shows the 'Wireless Setting' configuration page in the WBR-3406TX web console. The page is titled 'Broadband Router Configuration' and includes a navigation menu with options like 'Status', 'Wizard', 'Basic Setting', 'Forwarding Rules', 'Security Setting', 'Advanced Setting', and 'Toolbox'. The 'Basic Setting' menu is expanded, showing 'Primary Setup', 'DHCP Server', 'Wireless', and 'Change Password'. The 'Wireless' section is active, displaying a table of settings:

Item	Setting
Network ID(SSID)	3406WDS
Channel	11
Security	<input checked="" type="radio"/> Disable <input type="radio"/> WEP <input type="radio"/> 802.1x and RADIUS <input type="radio"/> WPA-PSK <input type="radio"/> WPA

At the bottom of the configuration area, there are buttons for 'Save', 'Undo', 'WDS Setting...', 'MAC Address Control...', and 'Help'. The 'Current Time' is displayed as Tuesday, February 01, 2005, 12:33:19 AM. The browser window shows the address 'http://192.168.10.10' and the taskbar includes 'WBR-3406TX Wi...', 'E:\WINDOWS\Sys...', and 'B DHCP disable - P...'.

4) The Lan MAC address of B WBR-3406TX

System Information

ITEM	INFO
Version	747D.7166.74AB.1AD9+225B+0010@SuezouW 197e1 \$B11
U-Time	00:09:04 (S=00:00:00,P=0/0)00:19:34
D-String	P=7C00,S=0,D=0/0,E=0,B=51/0,R=FFFE {++++,++.++T..+++++.....+++++.}
R-Data	WAN MAC=00-11-6B-22-51-4F/DDC6031 LAN MAC=00-11-6B-22-51-50 Checksum=347C
A-String	RA11G;M=00-11-6B-22-51-50; D=ETSI;A=2,C=1FFF,R=3FFF;St=2;TQ:1/1/1;PriQ:8/8,RQ:9/9,CNT=0/0/0
Device Time	Tue Feb 01 00:19:34 2005

Refresh

5) B WBR-3406TX WDS setting

level one Broadband Router Configuration

English Deutsch 中文 한국어

Status/ Wizard/ Basic Setting/ Forwarding Rules/ Security Setting/ Advanced Setting/ Toolbox Logout

Basic Setting

- Primary Setup
- DHCP Server
- Wireless
- Change Password

Current Time
Tuesday, February 01, 2005
12:02:09 AM

WDS Setting

Item	Setting
Wireless Bridging	<input type="radio"/> Disable <input checked="" type="radio"/> Enable
Remote AP MAC	00-11-6B-22-20-AC

Save Undo Help