

Log in to the device by console, enable webserver, and configure management ip address

SWITCH login: admin

Password:

GTP-5271 release/5.1.0 (r251 f9977f6) 2021-06-30 15:38:30 +0800

SWITCH>en



SWITCH#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

SWITCH(config)#web-server enable


SWITCH(config)#management vlan 1 ip address 192.168.1.1/24 gateway 192.168.1.254

1 \ use web browser to Log in to the device whose software version is 5.x, select system→  
system upgrade

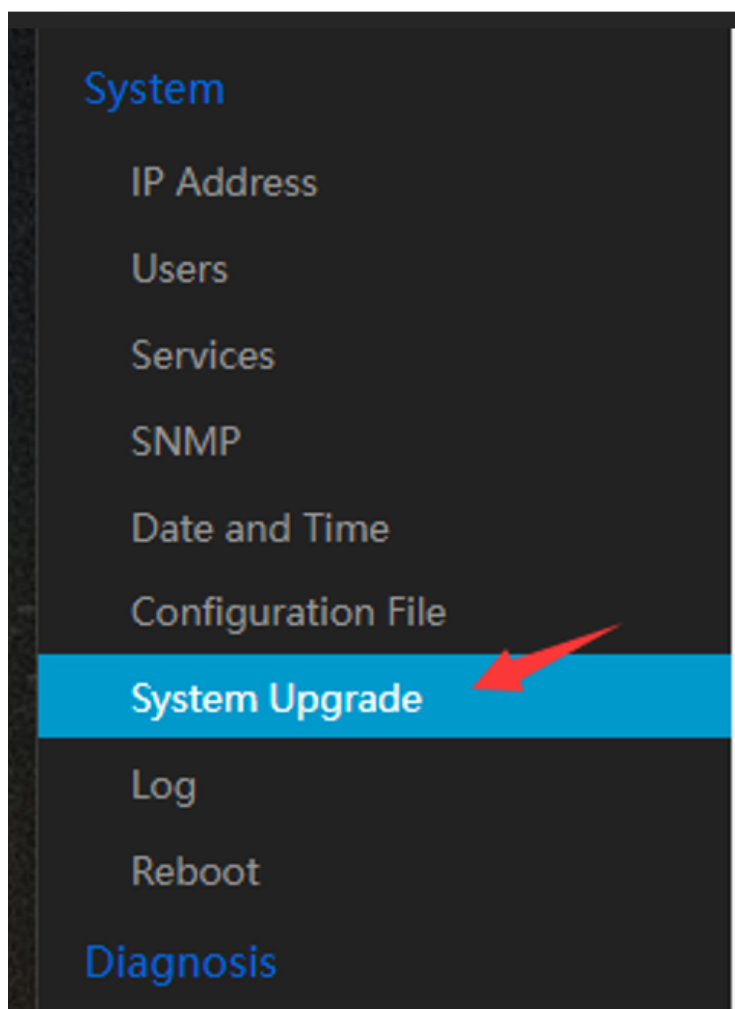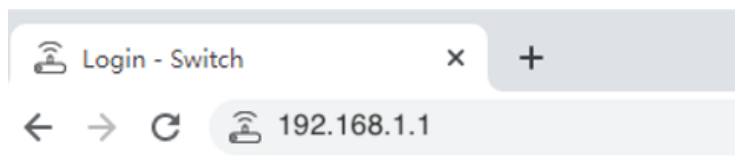

2 \ Click choose File, select the lite-release-7.1.0.bin file

3 \ Click the upgrade button to upgrade, and the device will automatically restart after the upgrade is completed. Please re-enter the IP address of the device in the browser navigation bar , and you will re-enter the new version of the software interface. (If the web page fails to load, please press ctrl+ F5 to force refresh)

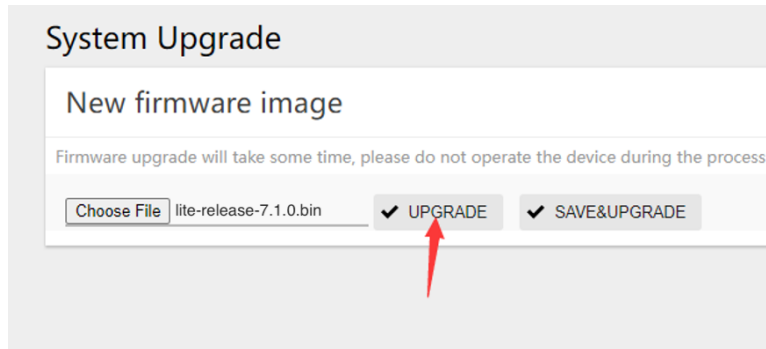

4 \ After upgrading to version 7.1.0, log in again and select →maintenance File management →data management, click upgrade package, select the **GTP-5271.zip** upgrade package. After the upgrade is complete, the device will automatically restart. (If the webpage fails to load, please press ctrl+ F5 to force a refresh)

