



## **FEP-2401 Series**

24-Port Fast Ethernet PoE Switch, 802.3at/af PoE

## **User Manual**

# 1. Introductions


Thank you for purchasing the **PoE Switch**.

The **PoE Switch**, is a 24-port 10M/100M PoE + 2-port 10M/100M/1000M(UTP) Switch with PoE On/Off control capability. With 24 dip switches, each PoE port can be manually set for On-Off control. 24-Port PoE Switch supports up to 30W on each LAN port when the corresponding port DIP switch is set ON. The Gigabit ports are supporting 10/100/1000M as uplink port connecting NVR or other edge switch via either UTP port.

The **PoE Switch** supports power protections as OVP (Over Voltage Protection), OCP (Over Current Protection), robust short-circuit protection (SCP) and surge protection. You may also make use of PoE repeater to extend another 100 meters or several 100 meters distance if multiple PoE repeaters are cascaded.

# 2. Application

## PoE Switch Connects with PoE PD Devices

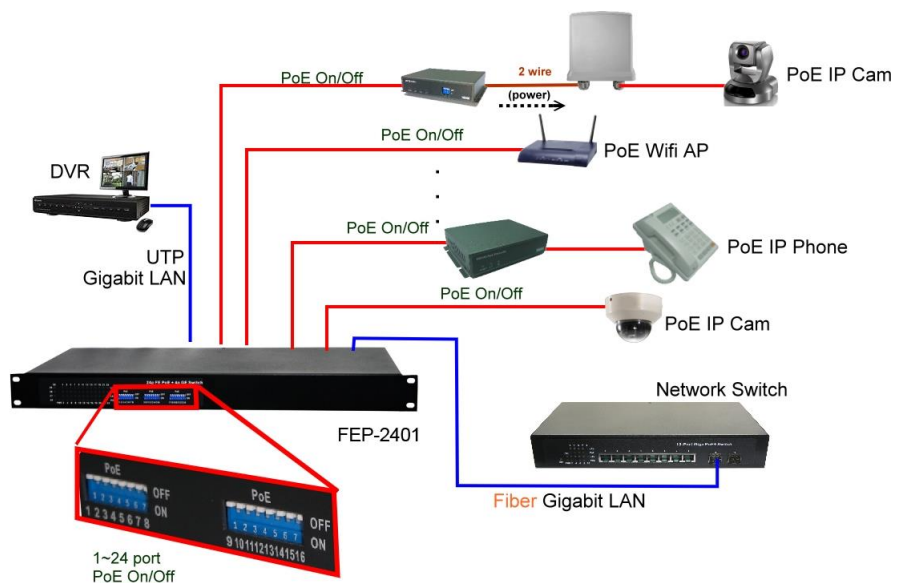

# 3. Packing Contents

Inside the package you shall find:

- (1) One PoE Switch
- (2) One AC input port (100~240V)
- (3) One User Manual

Please check if the packing is damaged or any component is missing. If so, please contact your distributor.

## 4. Technical Specifications

<b>Standards</b>	IEEE 802.3/u 10/100/1000BaseT/TX IEEE 802.3x Flow Control IEEE 802.3at/af PoE compliant midspan PoE compliant
<b>Features</b>	MAC Address: 8K Buffer Memory: 512KB Transmission Method: Store and Forward
<b>Filtering/Forwarding Rates</b>	1000Mbps port – 1,488,000pps 100Mbps port - 148,800pps 10Mbps port - 14,880pps
<b>Transmission Media</b>	10BaseT Cat. 3, 4, 5 UTP 100/1000BaseTX Cat. 5 UTP/SFP
<b>PoE on each Port</b>	30W
<b>Output PoE Pin</b>	4, 5, 7, 8
<b>LED Indicators</b>	Port 1~24: 10/100M, PoE ON/OFF Power, Port 25, 26: 10/100/1000M
<b>Power Adaptor</b>	Input: 100-240VAC, 50~60Hz Output: 56VDC
<b>Dimensions</b>	480 x 118 x 40 mm (L x W x H)
<b>Weight</b>	2.5 kgs
<b>Operating Temperature</b>	0 to 40°C
<b>Humidity</b>	10 to 90% RH (non-condensing)
<b>Certifications</b>	FCC Class A, CE

## 5. LED Indicators

**POWER:** “Green On” indicates power is on and normal.

**Port 1~24 LAN:** “Green On” indicates each Ethernet LAN port is in connection.

**GbE Port 25, 26:** “Green On” indicates Gigabit LAN port is in connection.

“Yellow On” indicates Fast Ethernet LAN port is in connection.

**PoE:** “Green On” indicates Power over Ethernet function is enabled for each port.

“OFF” indicates the PoE is disabled, and it becomes a regular LAN port.

## 6. Dip Switch Settings vs Power over Ethernet

	<b>1 ~ 24 ports DIP ON</b>
<b>Per PoE Port</b>	<b>30 Watts Injected</b>
<b>Maximum PoE Power</b>	<b>150/250/380/500/630 Watts</b>

Note that the dip switches can be switched ON and OFF anytime. However, it is suggested that the dip switches be set ready before the PoE port is connected for power management.

The device will be re-started if the overall PoE power consumption is over the power budget. Please make less PoE ports enabled when over the power budget.